

### Features

- Backward compatible with SQ9910
- Efficiency > 90%
- Universal rectified 85V<sub>AC</sub> to 265V<sub>AC</sub> input range
- Constant current LED driver
- Applications from a few mA to more than 1.0A
- LED string from one to hundreds of diodes
- PWM low-frequency dimming via SCP pin
- Input voltage surge ratings up to 500V
- Power-on sequence control and soft-start (SS)
- Spread spectrum to reduce EMI filter cost
- Short circuit protection (SCP)
- Internal over temperature protection (OTP)

### Typical Applications


- DC/DC or AC/DC LED Driver applications
- RGB backlighting LED Driver
- Backlighting of flat panel displays
- General purpose constant current source
- Signage and decorative LED lighting

### Product Description



The SQ9911 is pin-to-pin functionally backward compatible with the SQ9910 for better system performance and cost. The SQ9911 adds soft-start function to reduce input surge current during cold start. It typically waits for 400μs before normal PWM function starts. The SQ9911 also adds pseudo-random oscillator hopping function (Spread Spectrum) to reduce EMI emission so that input EMI filter cost can be reduced. Typical oscillator hopping range is approximately 8% around base frequency set by R<sub>OSC</sub>. The SQ9911 also provides short circuit protection feature to turn off MOSFET with external LED short sensing circuit. The SQ9911 allows efficient operation of high-brightness (HB) LEDs from AC voltage sources ranging from 85V<sub>AC</sub> up to 265V<sub>AC</sub>. The SQ9911 controls an external MOSFET at fixed switching frequency up to 300kHz. The LED string is driven at constant current rather than constant voltage, thus providing constant light output and enhanced reliability. The output current can be programmed between a few mA and up to more than 1.0A

The SQ9911 is available in SOP-8 and SO8-EP packages.

### Typical Application Circuit

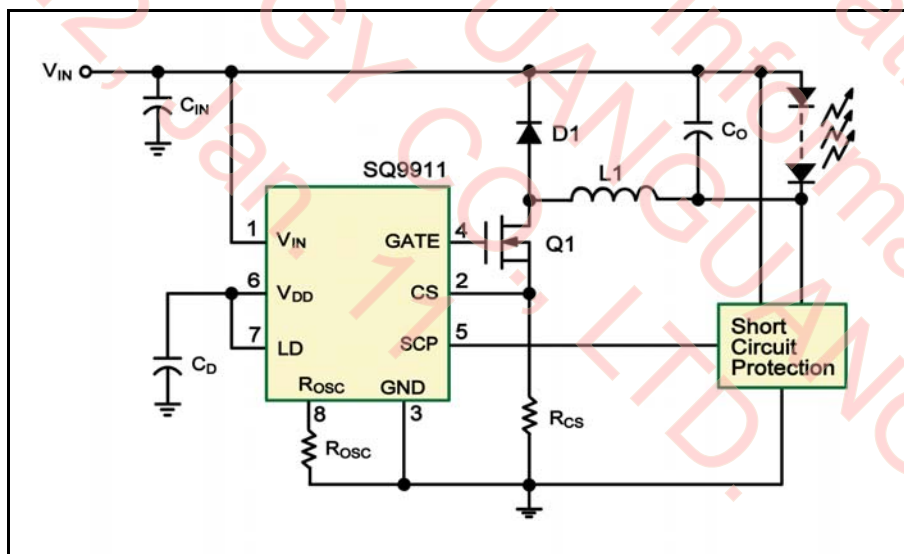

### Pin Assignments and Ordering Information

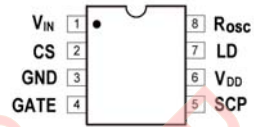 <p><b>SOP-8 (TOP VIEW)</b></p>	<p><b>SQ9911 MST</b></p>
 <p><b>SO8-EP (TOP VIEW)</b></p>	<p><b>SQ9911 MPT</b></p>

### Pin Descriptions

Pin No.		Pin Name	Function
SOP-8	SO8-EP		
1	1	$V_{IN}$	<b>Input voltage pin.</b> DC input supply voltage.
2	2	CS	<b>Current sensing input pin.</b> Senses LED string current.
3	3	GND	<b>Ground pin.</b> Device ground.
4	4	GATE	<b>Gate driver output pin.</b> Drives the gate of the external MOSFET.
5	5	SCP	<b>Short circuit protection input pin.</b> This pin triggered at voltage level below 1.2V. Internal 200k $\Omega$ resistor pull down to GND.
6	6	$V_{DD}$	<b>Internal/External supply voltage pin.</b> Internally regulated supply voltage. 7.5V nominal. This pin can supply up to 1.0mA for external circuitry. A sufficient storage capacitor is used to provide storage when the rectified AC input is near the zero crossings.
7	7	LD	<b>Linear dimming input pin.</b> Linear dimming by changing the current limit threshold at current sensing comparator.
8	8	$R_{OSC}$	<b>Oscillator control pin.</b> A resistor connected between this pin and GND sets the PWM frequency.
N/A	EP	EP Pad	<b>Exposed pad.</b> Package bottom. Connect to GND directly underneath the package.

**Absolute Maximum Ratings** <sup>(Note 1)</sup>

Symbol	Parameter	Ratings	Unit
$V_{INDC}$	DC input supply voltage range, $V_{IN}$ to GND	-0.5 ~ +520	V
$V_{CS}$	CS input pin voltage range relative to GND	-0.3 ~ +0.45	V
$V_{LD}$	LD input pin voltage range relative to GND	-0.3 ~ +(V <sub>DD</sub> + 0.3)	V
$V_{SCP}$	SCP input pin voltage range relative to GND	-0.3 ~ +(V <sub>DD</sub> + 0.3)	V
$V_{GATE}$	GATE output pin voltage range relative to GND	-0.3 ~ +(V <sub>DD</sub> + 0.3)	V
$V_{DD(MAX)}$	Maximum V <sub>DD</sub> pin voltage relative to GND	13.5	V
Continuous power dissipation (T <sub>A</sub> = +25°C)			
	8 Pin SO (derate 6.3mW/°C above +25°C)	0.63	W
	8 Pin SO-EP (derate 16mW/°C above +25°C)	1.6	W
T <sub>J</sub>	Junction temperature	+125	°C
T <sub>STG</sub>	Storage temperature range	-65 ~ +150	°C
θ <sub>JA</sub>	Junction-to-ambient thermal resistance for SOP-8	165	°C/W
θ <sub>JA(EP)</sub>	Junction-to-ambient thermal resistance for SO8-EP	60	°C/W

Note :

- Exceeding these ratings could cause damage to the device. All voltages are with respect to ground. Currents are positive into, negative out of the specified terminal.

**Recommended Operating Conditions**

Symbol	Parameter	Min.	Max.	Unit
$V_{INDC}$	DC input supply voltage range, $V_{IN}$ to GND	15	500	V
$V_{DD}$	Maximum recommended voltage applied to VDD pin <sup>(Note 2)</sup>		10	V
$V_{LD}$	LD input pin voltage range relative to GND	0	0.25	V
$V_{SCP}$	SCP input pin voltage range relative to GND	0	V <sub>DD</sub>	V
T <sub>OP</sub>	Operating temperature range for SOP-8 package <sup>(Note 3)</sup>	-40	+85	°C
T <sub>OP(EP)</sub>	Operating temperature range for SO8-EP package <sup>(Note 3)</sup>	-40	+105	°C

Note :

- When using the SQ9911 in isolated LED lamps an auxiliary winding might be used.
- Maximum ambient temperature range is limited by allowable power dissipation. The exposed pad SO8-EP with its lower thermal impedance allows the variants using this package to extend the allowable maximum ambient temperature range.

### Electrical Characteristics


(Over recommended operating conditions unless otherwise specified.  $T_A = +25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Input DC supply voltage range	$V_{INDC}$	15		500	V	DC input voltage
Shut down mode supply current	$I_{INSD}$		0.5	1.0	mA	Pin SCP to GND, $V_{IN} = 15\text{V}$
Internally regulated voltage	$V_{DD}$	7.0	7.5	8.0	V	$V_{IN} = 15\text{V} \sim 500\text{V}$ , $I_{DD(EXT)} = 0$ , GATE pin open
$V_{DD}$ current available for external circuitry <sup>(Note 4)</sup>	$I_{DD(EXT)}$			1.0	mA	$V_{IN} = 15\text{V} \sim 100\text{V}$
$V_{DD}$ under voltage lockout threshold	$V_{UVLO}$	6.4	6.9	7.5	V	$V_{DD}$ rising
$V_{DD}$ under voltage lockout hysteresis	$\Delta V_{UVLO(HYS)}$		500		mV	$V_{DD}$ falling
SCP enable threshold voltage	$V_{SCP}$			1.2	V	$V_{IN} = 15\text{V} \sim 500\text{V}$
SCP pull down resistance	$R_{SCP(DOWN)}$	150	200	250	k $\Omega$	$V_{SCP} = 5\text{V}$
Current sensing pull in threshold voltage	$V_{CS}$	225	250	275	mV	$T_A = -40^\circ\text{C} \sim +85^\circ\text{C}$
GATE high output voltage	$V_{GATE(HI)}$	$V_{DD} - 0.3$		$V_{DD}$	V	$I_{OUT} = 10\text{mA}$
GATE low output voltage	$V_{GATE(LO)}$	0		0.3	V	$I_{OUT} = -10\text{mA}$
Oscillator frequency	$f_{OSC1}$	20	26	32	kHz	$R_{OSC} = 1\text{M}\Omega$
	$f_{OSC2}$	80	100	120		$R_{OSC} = 226\text{k}\Omega$
Frequency hopping range	$\Delta f_{OSC} / f_{OSC}$		8		%	$R_{OSC} = 1\text{M}\Omega$ or $226\text{k}\Omega$
Maximum oscillator PWM duty cycle	$D_{MAX(HF)}$			100	%	$f_{PWM(HF)} = 25\text{kHz}$ , at GATE, CS to GND.
Linear dimming pin voltage range	$V_{LD}$	0		250	mV	$T_A \leq 85^\circ\text{C}$ , $V_{IN} = 20\text{V}$
Current sensing blanking interval	$t_{BLANK}$	160	250	440	ns	$V_{CS} = 0.55 \times V_{LD}$ , $V_{LD} = V_{DD}$
Delay from CS trip to GATE low	$t_{DELAY}$			300	ns	$V_{IN} = 20\text{V}$ , $V_{LD} = 0.15\text{V}$ , $V_{CS} = 0\text{V} \sim 0.22\text{V}$ after $t_{BLANK}$
GATE output rise time	$t_{RISE}$		30	50	ns	$C_{GATE} = 500\text{pF}$
GATE output fall time	$t_{FALL}$		30	50	ns	$C_{GATE} = 500\text{pF}$
Soft-start time	$t_{SS}$		400		$\mu\text{s}$	From appearance of pulses at driver pin to increase duty cycle more 50%
Thermal shut down	$T_{SD}$		150		$^\circ\text{C}$	
Thermal shut down hysteresis	$\Delta T_{SD(HYS)}$		50		$^\circ\text{C}$	

Note :

4. Also limited by package power dissipation limit, whichever is lower.

**Functional Block Diagram**

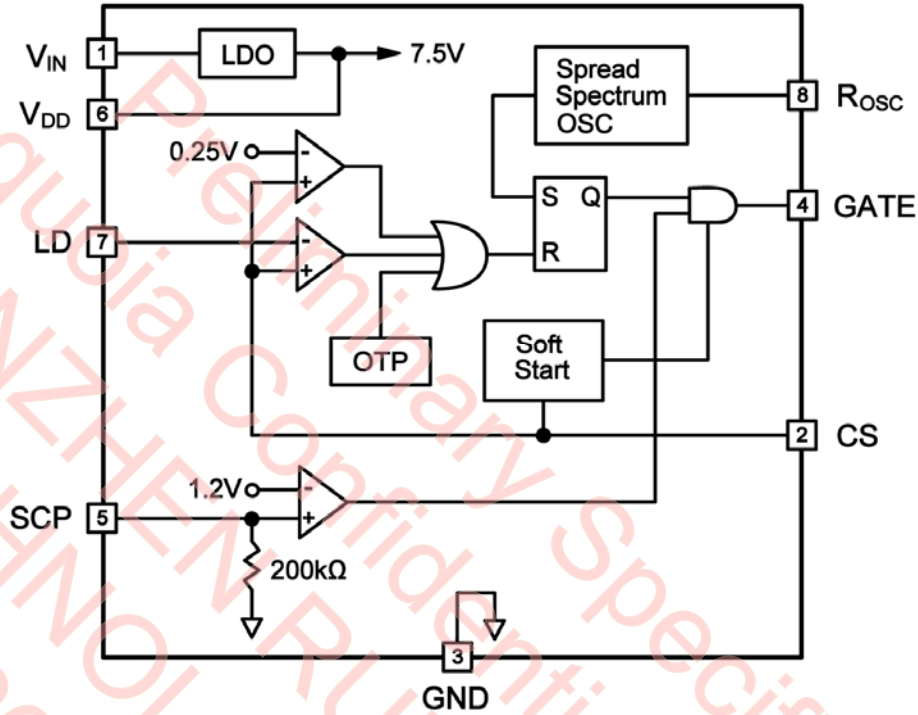

### Application Information

#### AC-DC Off-Line Application

The SQ9911 is a low cost off-line buck or boost converter control IC specifically designed for driving multi-LED strings or arrays. It can be operated from either universal AC line or any DC voltage between 15V~500V. Optionally, a passive power factor correction circuit can be used in order to pass the AC harmonic limits set by EN61000-3-2 class C for lighting equipment having input power less than 25W. The SQ9911 can drive up to hundreds of HB LEDs or multiple strings of HB LEDs. The LED arrays can be configured as a series, or series/parallel connection. The SQ9911 regulates constant current that ensures controlled brightness and spectrum of the LEDs, and extends their lifetime.

The SQ9911 can also control brightness of LEDs by programming continuous output current of the LED driver (so-called linear dimming) when a control voltage is applied to the LD pin.

The SQ9911 is offered in a standard 8-pin SOIC and SOIC-EP packages.

The SQ9911 is built-in an internal high-voltage linear regulator that powers all internal circuits and can also serve as a bias supply for low voltage and low power external circuitry.

#### LED Driver Operation

The SQ9911 can control all basic types of converters, isolated or non-isolated, operating in continuous or discontinuous conduction mode. When the gate signal turns on the external power MOSFET, the LED driver stores the input energy in an inductor or in the primary inductance of a transformer and, depending on the converter type, may partially deliver the energy directly to LEDs. The energy stored in the magnetic component is further delivered to the output during the off-cycle of the power MOSFET producing current through the string of LEDs (Fly-back mode of operation).

When the voltage at the  $V_{DD}$  pin exceeds the  $V_{UVLO}$  threshold voltage, the gate drive is enabled. The output current is controlled by means of limiting peak current in the external power MOSFET. A current sensing resistor is connected in series with the source terminal of the

MOSFET. The voltage from the sensing resistor is applied to the CS pin of the SQ9911. When the voltage at CS pin exceeds a peak current sensing threshold voltage, the gate drive signal terminates, and the power MOSFET turns off. The threshold is internally set to 250mV, or it can be programmed externally by applying voltage to the LD pin. Additionally, a simple passive power factor correction circuit, consisting of 3 diodes and 2 capacitors, can be added as shown in the typical application circuit diagram of Figure 4.

#### Supply Current

A current of 1.0mA is needed to start the SQ9911. As shown in the block diagram on page 5, this current is internally generated in the SQ9911 without using bulky startup resistors typically required in the off-line applications. Moreover, in many applications the SQ9911 can be continuously powered using its internal linear regulator that provides a regulated voltage of 7.5V for all internal circuits.

#### Setting Lighting Output

When the buck converter topology of Figure 3 is selected, the peak CS voltage is a good representation of the average current in the LED. However, there is a certain error associated with this current sensing method that needs to be accounted for. This error is introduced by the difference between the peak and the average current in the inductor. For example, if the peak-to-peak ripple current in the inductor is 150mA, to get a 500mA LED current, the sensing resistor should be as follows :

$$R_{CS} = \frac{250\text{mV}}{500\text{mA} + 0.5 \times 150\text{mA}} = 0.43\Omega$$

#### Linear Dimming (LD)

The linear dimming can be implemented by applying a control voltage from 0 to 250mV to the LD pin. This control voltage overrides the internally set 250mV threshold level of the CS pin and programs the output current accordingly. For example, a potentiometer connected between  $V_{DD}$  and ground can program the control voltage at the CS pin. Applying a control voltage higher than 250mV will not change the output current setting. When higher current is desired, select a smaller sensing resistor.

### PWM Dimming

Because the SQ9911 is pin-to-pin functionally backward compatible with the SQ9910, dimming can be accomplished by removing or disabling external short circuit protection sensing circuit and applying external PWM signal at this pin. The general PWM dimming frequency is chosen between 50Hz to 1kHz. Please refer to the design note of the SQ9911 for details.

### Programming Operating Frequency

The operating frequency of the oscillator is programmed between 25kHz and 300kHz using an external resistor connected to the R<sub>OSC</sub> pin.

Equation :

$$f_{\text{OSC}} = \frac{25000}{R_{\text{OSC}} + 22} \quad (1)$$

where  $f_{\text{OSC}}$  unit is kHz. R<sub>OSC</sub> unit is in k $\Omega$  and shall be 820k $\Omega$  ~ 1M $\Omega$  for the case of V<sub>OUT</sub> < 7V because it has to satisfy the condition of  $t_{\text{ON}} > t_{\text{BLANK}}$ . The efficiency can be improved as well.

### Soft-Start

At initial power start, because the output voltage or current is not established yet, the feedback voltage (V<sub>CS</sub>) generated from the output LED current is less than reference level, the internal error amplifier will be activated and pushes PWM duty cycle to maximum. This sudden maximum duty cycle will generate a high input surge current which might damage the power MOSFET. The SQ9911 has an internal soft-start circuit which does not require any external capacitor. This soft-start circuit will compare the voltage level at V<sub>CS</sub> pin and limit the input current by generating small duty cycle pulses at the GATE pin at 1/4 of the oscillation frequency to gradually increase the output current until it reaches final stable duty cycle and enter normal operation mode. This slowly increased input current will prevent surge current from happening to avoid damaging the external MOSFET. The typical soft-start period is design about 400 $\mu$ s.

### Spread Spectrum

The oscillator incorporates circuitry that introduces a small amount of frequency jitter, typically 8% frequency hopping range to minimize EMI emission. The modulation rate of the frequency jitter is set by pseudo-random

frequency hopping to optimize EMI reduction for both average and quasi-peak voltage emissions.

### Power Factor Correction

When the input power to the LED driver does not exceed 25W, a simple passive power factor correction circuit can be added to the SQ9911 typical application circuit in Figure 4 in order to pass the AC line harmonic limits of the EN61000-3-2 standard for class C equipment. The typical application circuit diagram shows how this can be done without affecting the rest of the circuit significantly. A simple circuit consisting of 3 diodes and 2 capacitors is added across the rectified AC line input to improve the line current harmonic distortion and to achieve a power factor greater than 0.85.

### Inductor Design

The buck circuit is usually selected and it has two operation modes: continuous and discontinuous conduction modes. A buck power stage can be designed to operate in continuous mode for load current above a certain level usually 15% to 30% of full load. Usually, the input voltage range, the output voltage and load current are defined by the power stage specification. This leaves the inductor value as the only design parameter to maintain continuous conduction mode. The minimum value of inductor to maintain continuous conduction mode can be determined by the following example.

Referring to the typical buck application circuit on Figure 3, the value can be calculated from the desired peak-to-peak LED ripple current in the inductor. Typically, such ripple current is selected to be 30% of the nominal LED current. In the example given here, the nominal current I<sub>LED</sub> is 350mA. The next step is to determine the total voltage drop across the LED string. For example, when the string consists of 10 high-brightness LEDs and each diode has a forward voltage drop of 3.3V at its nominal current, i.e. the total LED voltage drop V<sub>LEDS</sub> is 33V.

Equation :

$$D = \frac{V_{\text{LEDS}}}{V_{\text{IN}}} \quad (2)$$

$$t_{\text{ON}} = \frac{D}{f_{\text{OSC}}} \quad (3)$$

$$L \geq \frac{(V_{\text{IN}} - V_{\text{LEDS}}) \times t_{\text{ON}}}{0.3 \times I_{\text{LED}}} \quad (4)$$

$$R_{CS} = \frac{0.25}{I_{LED} + [0.5 \times (I_{LED} \times 0.3)]} \quad (5)$$

Assuming the nominal rectified input voltage  $V_{IN} = 120V \times 1.41 = 169V$ , the switching duty ratio can be determined as follows :

$$D = \frac{V_{LEDS}}{V_{IN}} = \frac{33}{169} = 0.195 \quad (6)$$

Then, in this example, given the switching frequency,  $f_{OSC} = 50kHz$ , the required on-time of the MOSFET transistor can be calculated as below :

$$t_{ON} = \frac{D}{f_{OSC}} = 3.91\mu s \quad (7)$$

The required minimum value of the inductor is given by :

$$L_{MIN} = \frac{(V_{IN} - V_{LEDS}) \times t_{ON}}{0.3 \times I_{LED}} = 5.06mH \quad (8)$$

### Input Bulk Capacitor

An input filter capacitor should be designed to hold the rectified AC voltage above twice the LED string voltage throughout the AC line cycle. Assuming 15% relative voltage ripple across the capacitor, a simplified formula for the minimum value of the bulk input capacitor is given by :

Equation :

$$C_{IN} \geq \frac{P_{IN} \times (1 - D_{CH})}{\sqrt{2} V_{LINE(MIN)} \times 2f_L \times \Delta V_{DC(MAX)}} \quad (9)$$

where

$D_{CH}$  :  $C_{IN}$  capacity charge work period, generally about 0.20 ~ 0.25,

$f_L$  : input frequency for full range ( $85V_{RMS} \sim 265V_{RMS}$ ),

$\Delta V_{DC(MAX)}$  should be set 10% ~ 15% of  $\sqrt{2} V_{LINE(MIN)}$

And

$$C_{MIN} = \frac{I_{LED} \times V_{LEDS} \times 0.06}{V_{IN}^2} \quad (10)$$

$C_{MIN} = 24 \mu F$ , a value  $33\mu F/250V$  can be used.

A passive PFC circuit at the input requires using two series connected capacitors at the place of calculated  $C_{MIN}$ . Each of these identical capacitors should be rated for  $\frac{1}{2}$  of the input voltage and have twice as much capacitance.

### Short Circuit Protection

The SQ9911 can turn off MOSFET with minimum external sensing circuitry as soon as LED short circuit is detected. In order to achieve this, a sensing circuit, consisting of a resistor,  $R_{PC}$  and a photo-coupler, PC817, are added in parallel with output LED load as shown by Figure 3 and 4. In the normal operation when LEDs are present at output, smaller current flows through the resistor  $R_{PC}$  and turns on the photo-coupler, PC817, and then flows through an internal 200k $\Omega$  pull down resistor at SCP pin. This on-state photo-coupler will set its emitter terminal at a voltage level close to  $V_{DD}$  which is above 1.2V and therefore SCP function is disabled. As soon as these two terminals, LED+ and LED- are shorted, there will be no voltage drop across the  $R_{PC}$  and PC817, so there is no current flowing through the photo-coupler, and SCP pin will be pulled down to below 1.2V due to internal pull down resistor. The MOSFET is turned off as soon as  $V_{SCP}$  is below 1.2V.

### DC-DC Low Voltage Application

#### Buck Converter Operation

The SQ9911 is an off-line AC-DC solution for LED lighting system. Due to its simplicity of buck topology when the LED string voltage is lower than the input supply voltage, this solution can be designed to meet various non-isolation applications including T8 and bulb LED lamps.

The design procedure for a buck LED driver outlined in the previous sections can be applied to the low voltage LED drivers as well. However, the designer must keep in mind that the input voltage must be maintained higher than 2 times the forward voltage drop across the LEDs. This limitation is related to the output current instability that may develop when the SQ9911 buck converter



Figure 3. Typical Application Circuit (without PFC)



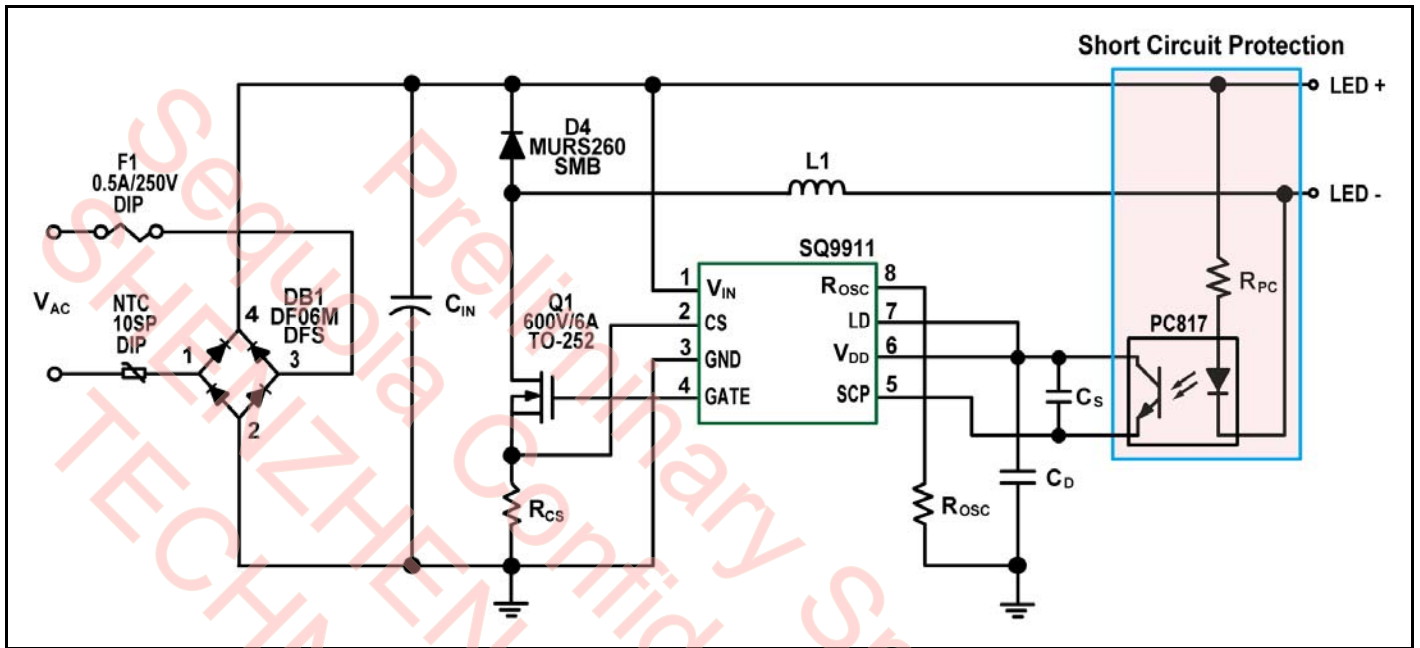


Figure 4. Typical Application Circuit (with Passive PFC)


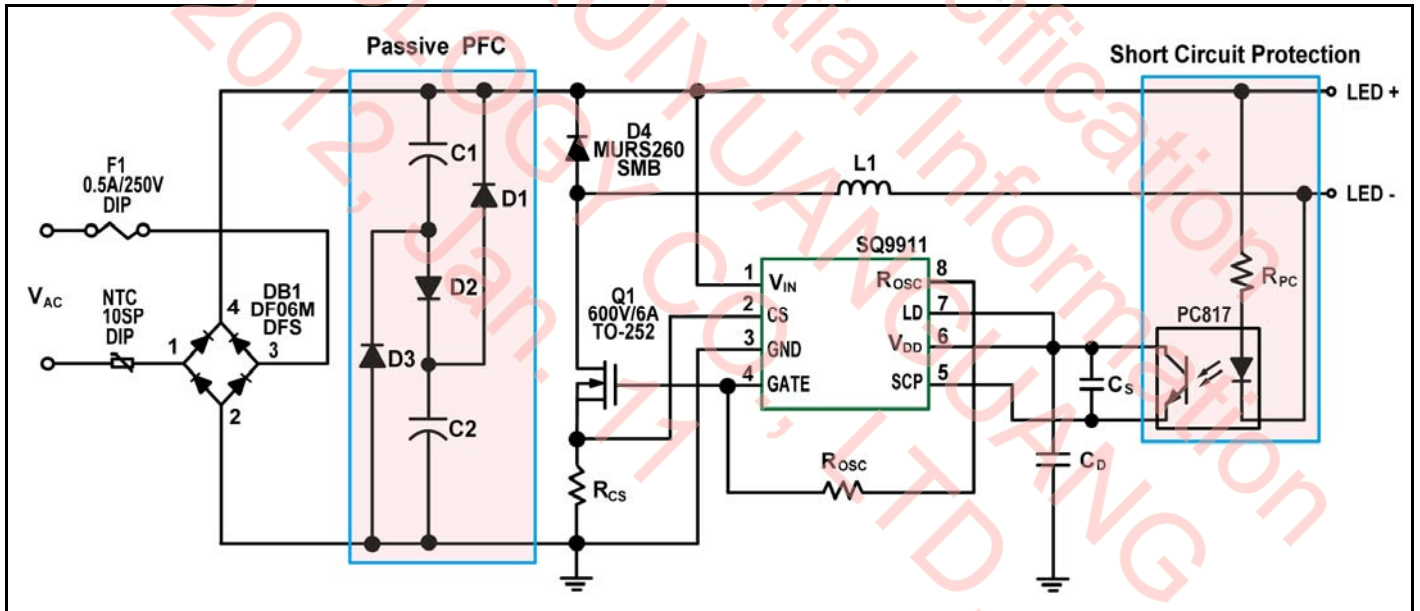


### Package Outline Dimensions

Package Type : SOP-8 / SO8-EP

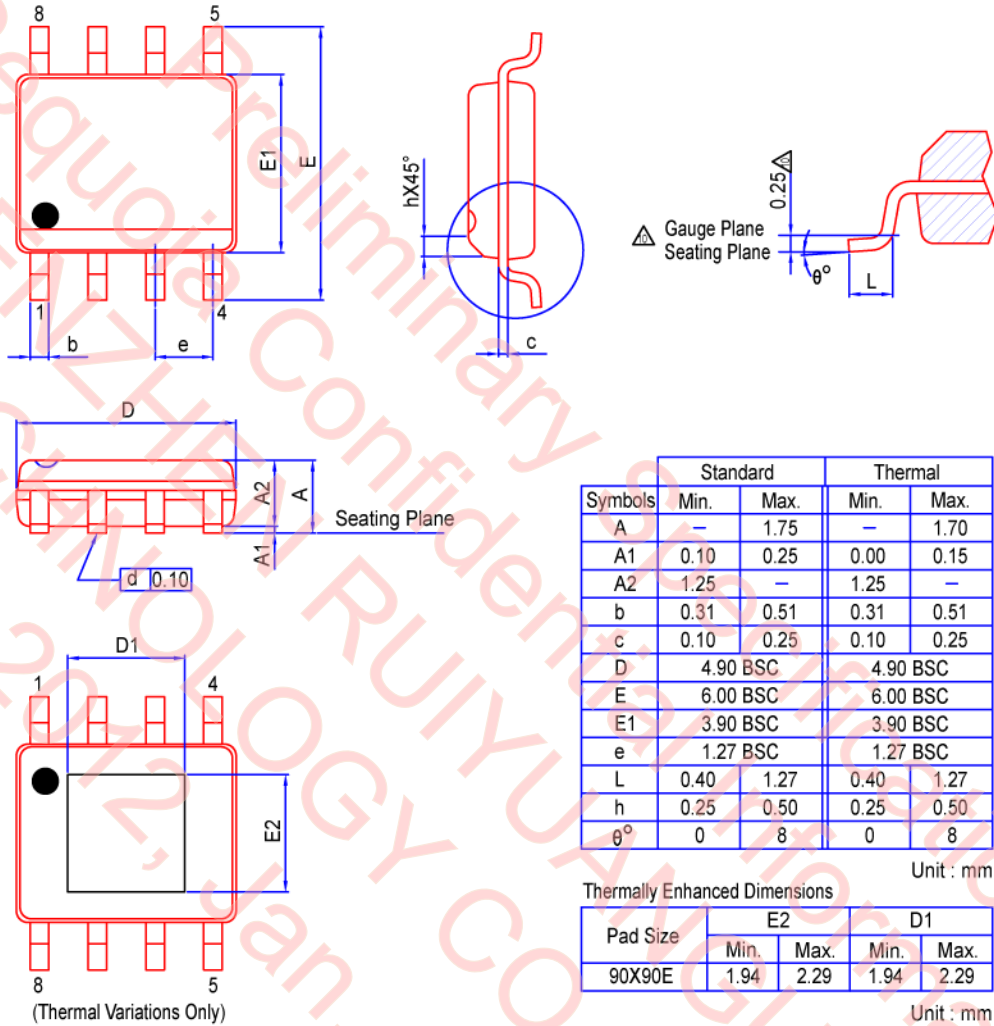

### Marking Information

SOP-8	SO8-EP
	

G = A/T Site, YY = Year, WW = Working Week

**Sequoia** Microelectronics Corp. (**Sequoia**) reserves the right to make changes to its data sheets and/or products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current and complete. Any products are sold subject to the terms and conditions of sales supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement and limitation of liability.

**Sequoia** warrants performance of its products to the specifications applicable at the time of sales in accordance with **Sequoia's** standard warranty. Testing and other quality control techniques are utilized to the extent **Sequoia** deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customer acknowledges that **Sequoia** products are not designed, manufactured, intended, authorized, or warranted to be suitable for use in any systems or products intended for use in connection with life support or other hazardous activities or environments in which the failure of the **Sequoia** products could involve potential risks of death, personal injury, or severe property or environmental damage ("High Risk Activities"). **Sequoia** hereby disclaims all warranties, and **Sequoia** will have no liabilities to customer or any third party, relating to the use of **Sequoia's** products in connection with any high risk activities.

Any support, assistance, recommendation or information that **Sequoia** may provide to customer (including, without limitation, regarding the design, development or debugging of customer circuit board or other application) is provide "AS IS". **Sequoia** does not make, and hereby disclaims, any warranties regarding any such support, including, without limitation, any warranties of merchantability or fitness for a particular purpose, and any warranty that such support will be accurate or error free or that customer circuit board or other application will be operational or functional. **Sequoia** will have no liability to customer under any legal theory in connection with customer use of or reliance on such support.

**Copyright © 2009, Sequoia Microelectronics Corp.**

**Sequoia** cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a **Sequoia** product. No circuit patent licenses are implied. **Sequoia** reserves the right to change the circuitry and specifications without notice at any time.